



JLD International BV

Boomkorstraat 5
1446 AK PURMEREND
The Netherlands

Tel. +31 (0)299 622 396

Mail. info@JLDinternational.com
Web. www.JLDinternational.com


*Safety, quality and the environment are paramount at JLD. We are: VCA** | ISO 9001 | CO2 Level5 certified. More information about this can be found on our website: www.JLDinternational.com*



VINYL SHEETPILE JLD U 610/9


Type JLD U	610/9	[metrc]
Material	Vinyl	
Section Width = w	606	mm
Section Height = h	230	mm
Section Thickness = t	9	mm
Section Modulus	1109	cm ³ /m
Moment of Inertia	12758	cm ⁴ /m
Allowable Moment	24,4	kNm/m
Ultimate Moment	48,8	kNm/m
EI Stiffness	165,85	kNm ² /m ¹
EI MAX Stiffness	331,7	kNm ² /m ¹
Weight	13,6	kg/m ¹
Weight	22,6	kg/m ²
MKI	3,44	MKI/m ²

Accessoires	C610/580	C45	C290	[metr.]
Width = w	58,8	73,71	290	mm
Height= h	96,5	50,8	90	mm
Thickness = t	--	--	10	mm
Weigth	2,80	3,2	5,50	kg/m ²

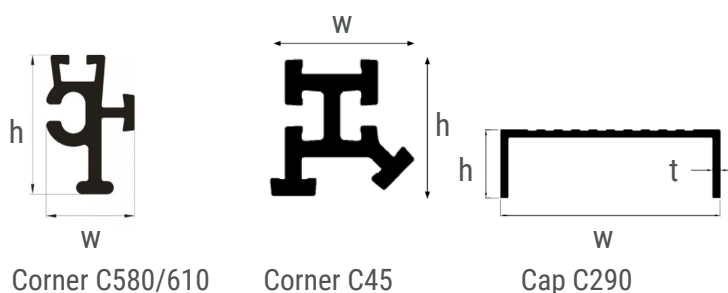

ACCESSOIRES

Corner C580/610; Corner C45; Cap C290



Type U 610/9

