

JLD International BV

Boomkorstraat 5
1446 AK PURMEREND
The Netherlands

Tel. +31 (0)299 622 396


Mail. info@JLDinternational.com
Web. www.JLDinternational.com

*Safety, quality and the environment are paramount at JLD. We are: VCA** | ISO 9001 | CO2 Level5 certified. More information about this can be found on our website: www.JLDinternational.com*



FRP SHEETPILE PROFILE GC-15.7

Type FRP	GC-15.7	[imperial]
Material	FRP	
Section Width = w	20	in
Section Height = h	10	in
Section Thickness = t	0.34	in
Section area (A)	22.0	in ²
Section Modulus (W_{el})	22.7	in ³ /ft
Moment of Inertia (I)	113.37	in ⁴ /ft
Ultimate Moment (M_{rep})	68.8	ft-kips/ft
Stiffness (EI_{max})	644.7	ibf-in ² x10 ⁶ /ft
Weight	9.68	lb/ft ¹
Weight	5,81	lb/ft ²

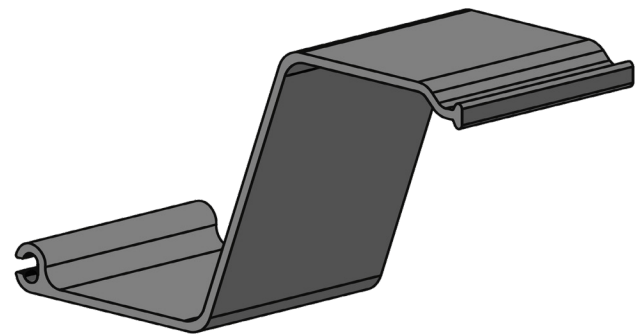

Type FRP	GC-15.7
Corner 194°F	☒
Corner 113°F	☒
Cover	☒

ACCESSORIES

Corner GC-45-90-S



Type GC-15.7

