

JLD International BV

Boomkorstraat 5
1446 AK PURMEREND
The Netherlands

Tel. +31 (0)299 622 396


Mail. info@JLDinternational.com
Web. www.JLDinternational.com

*Safety, quality and the environment are paramount at JLD. We are: VCA** | ISO 9001 | CO2 Level5 certified. More information about this can be found on our website: www.JLDinternational.com*



FRP SHEETPILE PROFILE GC-67.9


Type FRP	GC-67.9 [metric]	
Material	FRP	
Section Width = w	762	mm
Section Height = h	431,8	mm
Section Thickness = t	13,7	mm
Section area (A)	218,7	cm ² /m
Section Modulus (W_{el})	3.130	cm ³ /m
Moment of Inertia (I)	67.580	cm ⁴ /m
Ultimate Moment (M_{rep})	723	kNm/m
Stiffness ($EI_{initial}$)	26.356	kNm/m
Weight	32	kNm ² /m ¹
Weight	42	kNm ² /m ¹

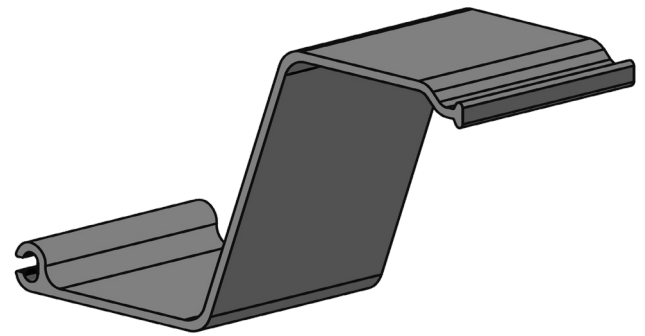

Type FRP	GC-67.9
Corner 90°C	☒
Corner 45°C	☒
Cover	☒

ACCESSORIES

Corner GC-45-90-L



Type GC-67.9

